

| | |
|----------------------|---------------------|
| Class IV | Class VII |
| 4ATLGS462B | 7ATLGS546B |
| 4ATLGS462AB | 7ATLGS546AB |
| 44ATLGS462SSB | 7ATLGS546SSB |
| 4ATLGS462SSAB | 7ATLGS546SSA |



MOT EQUIPMENT

Features:

- Flush fitting play detectors (which doesn't interfere with level of the beam setter area)
- Adjustable pressure control for play detectors to suit different weight vehicles
- Recessed platforms for flush fit ball race turn plates
- Hydraulic V shaped shaker plates
- VOSA approved play detectors
- Space saving installation
- Recessed or surface mounted
- German quality engineering
- Ridged construction



**To add wheel alignment or secondary lifting to this bay use part numbers:
4ATLGSAB/SSB/SSAB Class IV & 7ATLGSAB/SS/SSAB Class VII**

| 4ATLGS & 7ATLGS | 462B | 462AB | 462SSB | 462SSAB | 546B | 546AB | 546SSB | 546SSAB |
|---------------------------|------------|--------|--------|---------|-----------|--------|--------|---------|
| Lifting Capacity | 4000 | 4000 | 4000 | 4000 | 5000 | 5000 | 5000 | 5000 |
| Lifting /Lowering Time | 35/29 | 35/29 | 35/29 | 35/29 | 31/19 | 31/19 | 31/19 | 31/19 |
| Lifting Height (mm) | 1920 | 1920 | 1920 | 1920 | 1920 | 1920 | 1920 | 1920 |
| Runway Length (mm) | 4620 | | | | 5460 | | | |
| Runway Width (mm) | 635 | 635 | 635 | 635 | 636 | 636 | 636 | 635 |
| Drive on Height (mm) | 195 | 213 | 245 | 295 | 195 | 195 | 195 | 245 |
| Total Length above (mm) | 6155 /6235 | | | | 6655 | 6655 | 6655 | 6655 |
| Total Width (mm) | 2120 | 2120 | 2120 | 2120 | 2170 | 2170 | 2170 | 2170 |
| Motor (kw) | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 |
| Power Supply (V/Hz) | 400/50 | 400/50 | 400/50 | 400/50 | 400/50 | 400/50 | 400/50 | 400/50 |
| Platform Length SS B (mm) | 1485-1945 | | | | 1485-1945 | | | |
| Lifting Height SS C (mm) | | 530 | 580 | 530 | 580 | 580 | 580 | 580 |



W: www.liftmasterltd.com E: info@liftmasterltd.com T: 01420 549038 F: 01420 549036



Class IV
4ATLES46B

Class VII
7ATLES53B


Liftmaster
ROBUST RELIABLE
ESTABLISHED IN 1985

MOT EQUIPMENT

Features:

- No cross rails or torsion bars between lifting platforms (for maximum accessibility in the working area).
- Hydraulically operated play detectors
- VOSA approved wheel play detectors
- Recessed or surface mounted
- Hydraulic shaker plates
- CE approved lift with low voltage controls
- Audible alarm during the final lowering phase

VOSA APPROVED EQUIPMENT

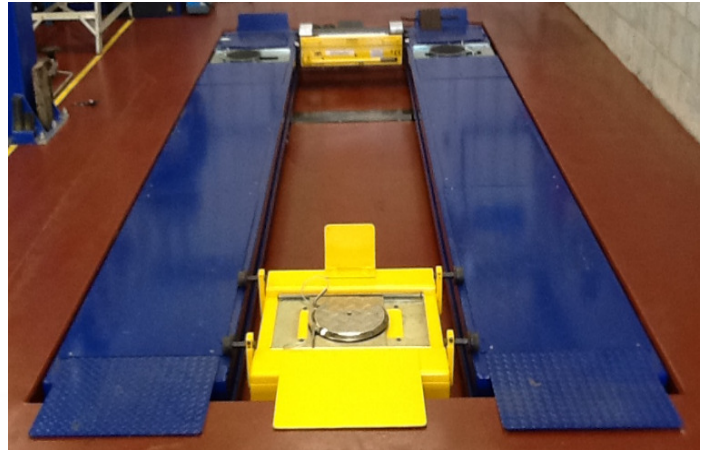


- All pivot points made with self lubricating bushings for long life
- Recessed platforms for flush fit ball race turning plates



| 4ATLGS & 7ATLGS | 46B | 53B |
|--------------------------------|--------|--------|
| Lifting Capacity | 3500 | 5000 |
| Lifting /Lowering Time | 34/26 | 52/32 |
| Lifting Height (mm) | 1805 | 1805 |
| Runway Length (mm) | 4600 | 5300 |
| Runway Width (mm) | 615 | 650 |
| Drive on Height (mm) | 280 | 310 |
| Total Length above ground(mm) | 6110 | 6830 |
| Total Width (mm) | 2070 | 2100 |
| Motor (kw) | 3,0 | 3,0 |
| Power Supply (V/Hz) | 400/50 | 400/50 |

Options: (available at extra cost)

- Lighting kit
- Spacers for turn table housing
- Power unit cover
- Remote control hand set
- 1900 mm run-up ramps

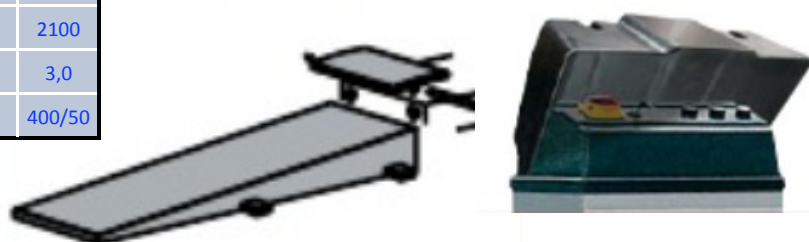

W: www.liftmasterltd.com E: info@liftmasterltd.com T: 01420 549038 F: 01420 549036

